


机座 Diameter 62 mm

- 1、使用环境: $-10-40^{\circ}\text{C}$
Environmental conditions: $-10-40^{\circ}\text{C}$
- 2、极数/相数: 4/3
Number of Poles /phase: 4/3
- 3、磁钢材料: 烧结钕铁硼
Magnet material: Sintered NdFeB
- 4、绝缘等级: B
Insulation Class: B
- 5、可以提供电压、转轴等专门设计
We can design the special voltage and shaft, and so on.

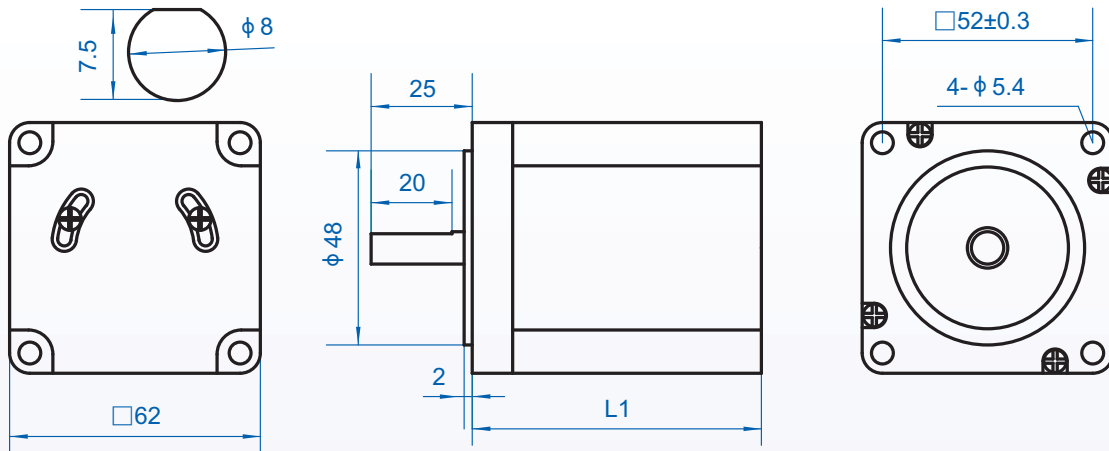

型号 Model		62ZWX01	62ZWX02	62ZWX03
电压 Voltage	V	36		
空载转速 No load speed	rpm	3900	3700	3700
额定转矩 Rated torque	Nm	0.22	0.40	0.65
额定转速 Rated speed	rpm	3200	3000	3000
额定电流 Rated current	A	4.5	7.1	12.7
最大转矩 Torque (max)	Nm	0.66	1.1	1.80
最大转矩时的电流 At Torque (max) Current	A	11.5	17.8	32.0
惯量 Rotor inertia	Kgmm ²	19.0	37.5	55.8
反电势 Back-EMF constant	V/krpm	4.30	4.60	4.53
转矩常数 Torque Constant	Nm/A	0.062	0.065	0.061
电阻 Resistance(20°C)	ohm	0.57	0.24	0.13
重量 Weight	Kg	0.9	1.3	1.8
长度 L1	mm	64	84	104
铁芯长度 Rotor: La	mm	20	40	60

机座 Diameter 62 mm | 无刷电机 BL MOTORS

