



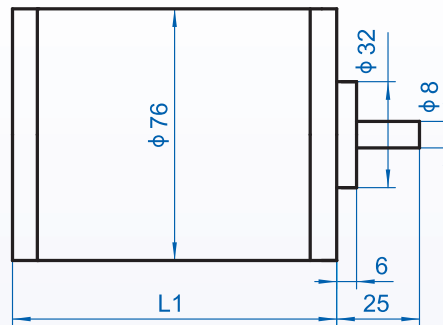

## 机座 Diameter 76 mm

- 1、使用环境: -10—40℃  
Environmental conditions:-10—40℃
- 2、极数: 2  
Number of Poles: 2
- 3、磁钢材料: 铁氧体  
Magnet material:Hard Ferrit
- 4、绝缘等级: B  
Insulation Class:B
- 5、可以提供电压、转轴等专门设计  
We can design the special voltage and shaft, and so on.

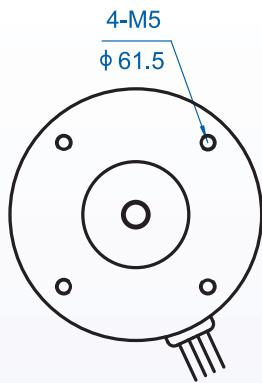

型号 Model		76ZYT01	76ZYT02	76ZYT03
电压 Voltage	V	24		
空载转速 No load speed	rpm	3200		
额定转矩 Rated torque	Nm	0.28	0.46	0.65
额定转速 Rated speed	rpm	2680	2680	2680
额定电流 Rated current	A	4.7	7.6	11.0
堵载转矩 Stall torque	Nm	1.45	2.40	3.40
堵载电流 Stall current	A	26.8	45.0	63.0
惯量 Rotor inertia	Kgmm <sup>2</sup>	170	285	400
反电势 Back-EMF constant	V/krpm	7.20		
转矩常数 Torque Constant	Nm/A	0.0688		
电阻 Resistance(20℃)	ohm	1.00	0.60	0.45
重量 Weight	Kg	1.0	1.4	2.0
长度 L1	mm	98	118	138
铁芯长度 Rotor: La	mm	30	50	70

# 机座 Diameter 76 mm | 直流电机 DC MOTORS

